

VERSALIFT

LAT-135-H 6

Low voltage pick-up mounted platform

NATIONAL
SMALL SERIES
APPROVED

ISUZU
AUTHORISED
CONVERTER



Isuzu D-Max



3.5T GVW



Articulated
boom



Fully hydraulic
controls



A-Frame
outriggers



Walk-in
bucket



On & off
road



Euro 6
compliance

Specifications

| | |
|---|-------------------------|
| | 3.5T GVW Isuzu D-Max |
| Working height | 13.3m |
| Platform height | 11.3m |
| Maximum outreach | 6.1m |
| Maximum bucket capacity | 230kg |
| Flyboom | Fixed |
| GVW | 3500kg |
| Maximum slope | 3°/ 5° |
| Payload (after driver, passenger & fuel)* | 500kg |

Standard equipment

- Fully hydraulic proportional control
- Double A-frame outriggers (front + rear)
- 230kg SWL walk-in bucket
- Access to bucket from ground
- 1kV certified insulation (annual dielectric test required)
- 12V DC emergency lowering system
- Emergency manual hand pump
- Low travel height <2.6m
- Improved on-road and impressive off-road capability
- Driven on a car licence
- Euro 6 compliance
- National Small Series Approved (NSSA) allowing fast delivery
- Two year warranty

Key features



Low travel height



Safe access to bucket from ground



Fitted with LV insulation as standard, the LAT135-H E6 features a stronger, lighter boom and a re-engineered pedestal.



An industry leading 500kg of payload* when mounted on an Isuzu D-Max



Safe access to bucket from vehicle




Hydraulic, 12V DC emergency ground controls and emergency hand pump

Optional equipment

- Chapter 8 compliance
- Bespoke locker installation
- Aluminium basket
- Full R&M contract available direct from the manufacturer

Diagrams

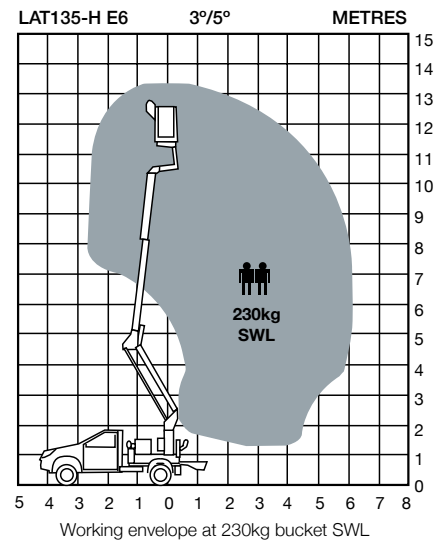

Double A-frame outriggers (front + rear) for narrow, compact set-up



Easy to use fully hydraulic proportional control

Notes

Technical information is subject to change without notice. Images may show optional equipment.
*Subject to options fitted

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.

Revision: 04/2019